




ThermRite™ Solid Floor Panels

Product Details

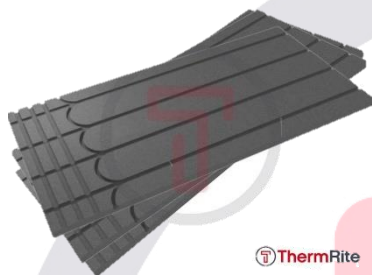

Panel Profile	Pipe Required	Pipe Centres	Panel Area	Construction Grade
18mm	12mm	150 centres (4 Grooves)	0.72m ²	300 kPa
25mm	16mm	150 centres (4 Grooves)	0.72m ²	300 kPa
		200 centres (3 Grooves)		

ThermRite™ Solid Floor Panel

consists of a rigid insulation panel designed to give high insulation

values and superior compressive strength (kPa), making it the ideal solution for use under tiles and suitable for both domestic and commercial applications.

This construction is designed to provide superior heat output, coupled with high strength and stability. The boards can be installed onto any stable existing floor, are designed to be tiled directly upon and are also suitable for most floor finishes, making them the ideal solution for installations where the final floor finish is yet to be decided.

ThermRite™ Solid Floor Panels have been tested and approved by **Instarmac**, for use with their Ultra range of adhesives, levelling compounds and primers as detailed in our installation instructions.

ThermRite™ Solid Floor Panels can be bonded down using our **Instarmac Ultratile Proflex S2** adhesive.

Installation Details

To ensure correct installation please read and follow the details below – should you have any queries before or during installation then do not hesitate to call our team before progressing – we are here to assist.

Installing ThermRite™ Solid Floor Panel Boards for solid floor finishes

This method permanently bonds the boards to the floor and is ideal for tile floor finishes, or when self-levelling prior to laying vinyl, bonded wood and carpet finishes

1. Prepare the floor

Prior to commencing installation the floor substrate must be solid and stable. Any loose material must be removed from concrete subfloors, floor boards and wood subfloors must be screwed down firmly to ensure no movement. Floors must be dry, structurally sound and solid and old floor coverings removed. For best finish, all floors should be flat and level prior to laying the overlay panels. Existing floor boards may first

need an overlay of suitable plywood screwed down to the floor boards to create a solid and stable surface. Clean the floor to remove all dust, dirt oil and grease.

For installation onto newly laid screed or concrete floors, the moisture content must be checked to ensure the subfloor is completely dried prior to commencing installation.

2. Loose lay the boards

Lay out the **ThermRite™ Solid Floor Panels** onto the floor, ensuring correct orientation of the boards to match your pipe layout diagram if you have one. Boards can be cut by hand using a utility knife or fine toothed saw. If slight amendments to the pipe channels are required they can be cut using a utility knife or by electric router. If cutting additional turns into a board you must ensure turns match the radius and are no sharper than the turns on the manufactured board.

Once all boards are satisfactorily laid into position and the floor area completely covered, number the boards on the top surface using a marker pen.

3. Fixing ThermRite™ Solid Floor Panels **Bond Using Ultra Tile Proflex S2 Adhesive Method:**

Ensure the subfloor is prepared as detailed in item “1” above. For wood subfloors you may need to overlay with a suitable plywood to fix any holes, level issues or uneven floor boards. For concrete/screed subfloors you may need to self-level the floor first to fix any holes, level issues or uneven floors.

Apply undiluted **Ultra Floor Prime-it MSP** to the back of the boards using a paint brush or roller, ensuring full and even coverage. Allow to fully dry.

Dilute **Ultra Floor Prime-it MSP** as 1 part primer to 3 parts water and apply to the subfloor ensuring full and even coverage. Allow to fully dry.

Once both the underside of the board and the subfloor are fully dry, commence laying **Ultra Tile Proflex S2 Adhesive** to the subfloor. Comb the adhesive out using a notched trowel to achieve a minimum 3mm consistent and even bed. Apply the boards to the adhesive ensuring all of the board is flat and in contact with the adhesive, before applying firm and even pressure to the entire topside of the board, to create a flat top surface free of any bumps and hollows. If additional fixing is required to wooden floors then screws and washers can be used.

Ideally the boards should be left to set for 24 hours prior to pipe installation.



4. Tiling Onto ThermRite™ Solid Floor Panels

2 options are available – Option 1 is suitable for all applications to keep floor build up heights low, but tiles must be larger than 10cm x 10cm.

Option 2 is ideal in scenarios where the floor finish will not be applied immediately, and the leveller therefore encapsulates the pipe to protect it before and during tile installation.

(a) Option 1: Tiling Directly onto ThermRite™ Solid Floor Panels using Ultra Tilefix ProFlex S2 adhesive

Ensure the boards are clean and free of grease, oil and dust.

Apply undiluted **Ultra Floor Prime-it MSP** to the top of the boards ensuring full and even coverage. Allow to fully dry. Bond the tiles using **Ultra Tilefix ProFlex S2** adhesive as a consistent and unbroken combed bed, ensuring no voids between the tiles and adhesive.

Allow the tiles to set for a minimum of 24 hours. Confirm once fully set before commencing grouting using a suitable flexible grout.



(b) Option 2: Self Levelling onto ThermRite™ Solid Floor Panels using Ultra Floor Level-it 2

Ensure the boards are clean and free of grease, oil and dust.

Apply undiluted **Ultra Floor Prime-it MSP** to the top of the boards ensuring full and even coverage. Allow to fully dry.

Apply **Ultra Floor Level-it 2** over the entire board area ensuring no voids or air pockets, to a minimum depth of 5mm over the pipes for tile floor finishes (10mm for all other floor finishes). Allow to fully dry (normally 24-48 hours)

Apply undiluted **Ultra Floor Prime-it MSP** to the top of the **Ultra Floor Level-it 2** ensuring full and even coverage. Allow to fully dry.

Bond the tiles using **Ultra Tilefix ProFlex SP** adhesive as a consistent and unbroken combed bed, ensuring no voids between the tiles and adhesive. Allow the tiles to set for a minimum of 24 hours. Confirm once fully set before commencing grouting using a suitable flexible grout.



NOTE: Upon completion of tiling and grouting as detailed in both Option 1 and Option 2, the floor should be left to cure for a minimum of 14 days. Only after this period should the underfloor heating system be turned on at the lowest heat setting. The heat setting can then be increased by 5°C per day to finally reach its normal working temperature (45-50°C). Failure to follow this initial heat-up instruction may damage the installation and floor finish.

5. Applying Vinyl, Engineered Wood, Laminate & Carpet onto ThermRite™ PRO Boards

Ensure the boards are clean and free of grease, oil, and dust.

Apply undiluted **Ultra Floor Prime-it MSP** to the top of the boards ensuring full and even coverage. Allow to fully dry.

Apply **Ultra Floor Level-it 2** over the entire board area ensuring no voids or air pockets, to a minimum depth of 10mm over the pipes. Allow to fully dry (normally 24-48 hours).

If gluing vinyl or wood floor finishes to the self-levelling layer, first apply undiluted **Ultra Floor Prime-it MSP** to the top of the **Ultra Floor Level-it 2** ensuring full and even coverage. Allow to fully dry.

Installing ThermRite™ Solid Floor Panels as a floating floor – for Interlocking Wood & Laminate floor finishes

For wood and laminate interlocking floating floor finishes, which are not going to be bonded to the panels, the ThermRite™ Solid Floor Panels do not require bonding to the subfloor.

Ensure the boards are clean and free of grease, oil, and dust.

Lay out the **ThermRite™ Solid Floor Panels** onto the floor, ensuring correct orientation of the boards to match your pipe layout diagram if you have one. Boards can be cut by hand using a utility knife or fine-toothed saw. If slight amendments to the pipe channels are required, they can be cut using a utility knife or by electric router. If cutting additional turns into a board, you must ensure turns match the radius and are no sharper than the turns on the manufactured board.

Once all boards are satisfactorily laid into position and the floor area completely covered, the pipe can be installed.

Upon completion and satisfactory test and inspection of the pipe, the wood/laminate floor can be laid. The interlocking wood/laminate floor must be laid at a 90-degree angle to the direction that the pipe runs in (ie the boards run across the length of pipe and not in the same direction as pipe runs).

NOTE: The maximum permissible floor temperature should be checked with the flooring supplier. General industry standard states a maximum floor temperature should not exceed 27°C for wood and laminate floors (although this should be confirmed for each individual install). In properties insulated to current building standards this temperature will not ordinarily be reached – however in poorly insulated properties this floor temperature may be reached as the floor attempts to heat the room and counteract the escaping heat. A floor sensor can be supplied to protect the floor if in any doubt.

