


Underfloor Heating Manifold

This pre-assembled Underfloor Heating Manifold is designed for fast and simple installation and will connect directly to our pump/temperature control units.

Certified with full UK **WRAS** Approval, this product can also be used in all UK domestic plumbing applications including drinking water installations - as well as central heating and underfloor heating systems.

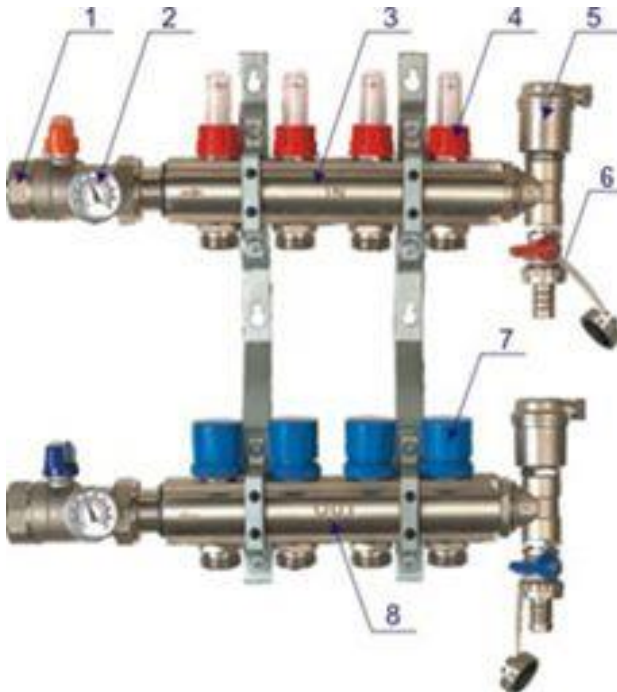


Features:

- 1: Isolating ball valves
- 2: Temperature gauges
- 3: Adjustable flow meters
- 4: Flow manifold
- 5: Auto air vents
- 6: Drain off points
- 7: Isolating caps
- 8: Return manifold

Manifold assembly Includes:

- 2 x manifold body (flow and return)
- Lockshields with flow meters on each port (0-5 l/min)
- 2 x isolation ball valves with temp gauge
- Manual adjustment valves on each port (interchangeable to actuators)
- 2 x water drain/fill valves with blank cap
- 2 x automatic air vent with manual bleed
- 2 x metal fixing brackets
- Pipe connectors (Eurocone Pipe Connectors)
- Installation manual

Manifold Specification / Dimensions

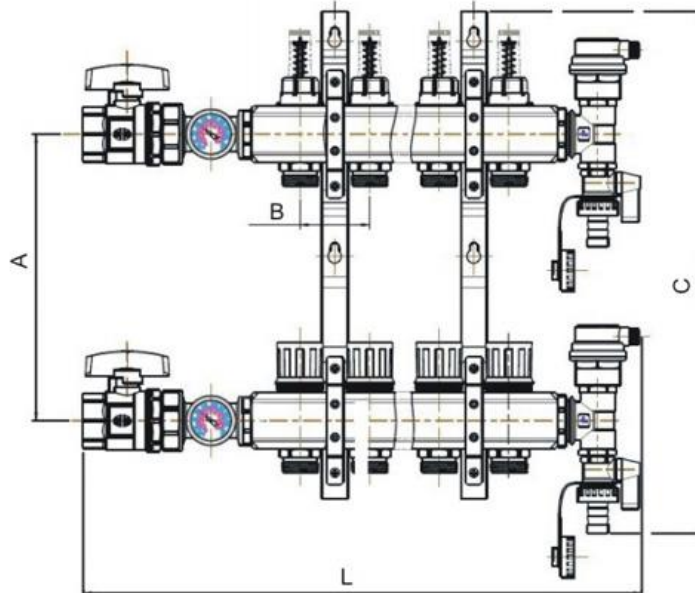

A	B	C	L (Length in mm according to No. of ports)										
122	50*n+20	385	284	334	384	434	484	534	584	634	684	734	784

CODE	SIZE	WAYS	CONNECTIONS
TM-2SS-1F-3/4	1"	2	3/4"
TM-3SS-1F-3/4	1"	3	3/4"
TM-4SS-1F-3/4	1"	4	3/4"
TM-5SS-1F-3/4	1"	5	3/4"
TM-6SS-1F-3/4	1"	6	3/4"
TM-7SS-1F-3/4	1"	7	3/4"
TM-8SS-1F-3/4	1"	8	3/4"
TM-9SS-1F-3/4	1"	9	3/4"
TM-10SS-1F-3/4	1"	10	3/4"
TM-11SS-1F-3/4	1"	11	3/4"
TM-12SS-1F-3/4	1"	12	3/4"

The Floor Heating Warehouse Ltd.
 Unit B, Radnor Business Park,
 Back Lane, Congleton,
 Cheshire
 CW12 4XJ

General Enquiries: info@tfhw.co.uk
 Design Enquiries: design@tfhw.co.uk