




## **ThermRite Grooved & Foiled Insulation Panel – Expanded Polystyrene - Grade EPS100 (BS EN 13163)**

**The ideal solution for laying interlocking Wood and Laminate floor finishes directly on top**

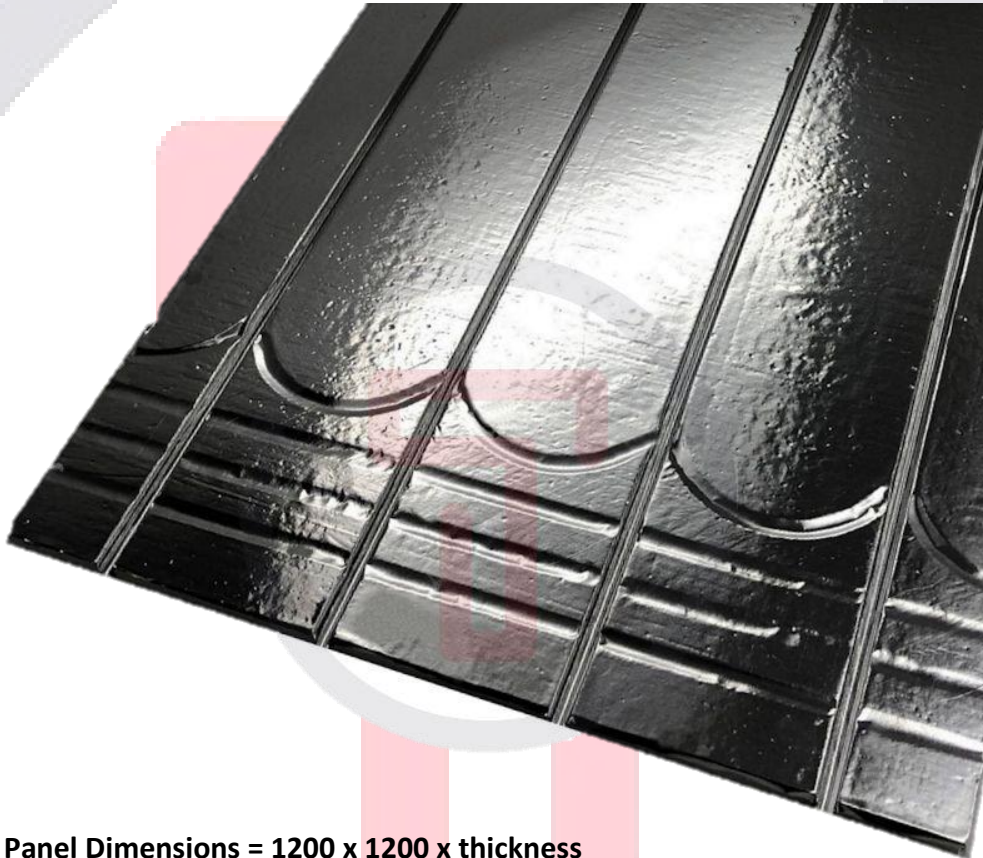

- **Panel Dimensions = 1200 x 1200 x thickness**
- **Panel Thickness = up to 150mm (in 1.0mm increments)**
- **Aluminium Foil Thickness = 45 microns**
- **Thermal Conductivity = 0.036 W/mK**
- **Compressive Strength = 100 kPa@ 10% compression**
- **Compressive Strength = 30 kPa@ 2% or Less Deformation**
- **Fire Classification = Euroclass F**